


7, ISDN PRI, R2D, 2, 1

- TDM – 16 E1
- – 10/100 BASE-T Ethernet, RS-232
- PSTN – SS7 ( MTP2, MTP3, ISUP), PRI (DSS1, QSIG, Q.931), R2D
- EUROPACK 19" 1U
- 2,5
- 220 VAC 48/60 VDC
- 24
- : 0° +60°
- : 80% +25°

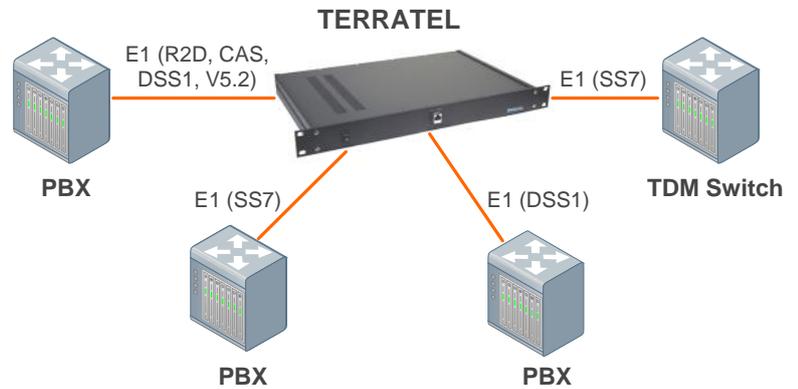

- 1
- TDM/PSTN
- E1 TDM-TDM

7, ISDN PRI, R2D, R1.5,

RS-232, COM1) ( Ethernet (TCP/IP). , . .) (